

HM-SEV-EDU HEGNER MULTICUT SEV EDUCATION VERSION – 1 PHASE

The Product

The HEGNER Multicut SEV Variable Speed has all the features of the Multicut 2SV but is fitted with a 17 5/8" x 9" Cast Iron rectangular table which is Precision Ground. Cast Iron base and frame, perfect parallel motion, 460mm throat, 65mm thickness capacity, 435 x 230mm rectangular Cast Iron worktable with dual tilt (45° to the left 12° right), under table guard, adjustable stroke length (long and short) and quick tension release.

Features

- Cast Iron base and frame
- Perfect parallel motion
- Cast Iron worktable
- Dual tilt (45° to the left 12° right)
- Under table guard
- Adjustable stroke length (long and short)
- Quick tension release
- Reliable 100 watt induction motors rated for continuous use

Included

1 x Pack of blades with 1 doz each grade 4 machine coping saw blades,
1 x clock key for blade changing, 2 x Blade Clamps fitted to machine,
2 x Blade Clamps spare, 1 x Quick Change blade clamp
1 x plastic table insert for fine cutting, 1 x tool kit including 2 Hex (Allen)
keys and 1 x Tommy bar

Dust extraction required

Installation Specification

Motor	1ph (230V) 0.1kW
Dimensions (HxWxD)	290mm x 2340mm x 610mm
Weight (Kg)	30

Technical Specification

Maximum Thickness of Cut	65mm
Table Size	435mm x 230mm
Throat Depth	460mm
Cutting Stroke	12mm and 19mm
Table Tilt	45° RH 12° LH

Maintenance Annual Requirement

Life Cycle 10 years +

Equipment Type Bench Mounted




Recommended Accessories

530-729	TSHS Small Machine Extractor 1ph
530-738	Extraction Hose 51mm
540-037	Hegner Extraction Port 50mm
999-1499	Jubilee Clips 50mm (2 req'd)

#

Safe Working Distances

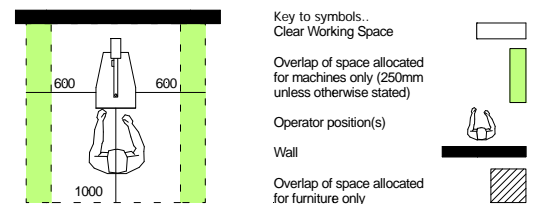

Health & Safety Requirements

FRETSAWS		
BS 4163:2014 Recommendations		
1.	Electrical isolation using a fused switch-disconnector.	✓
2.	Mushroom-headed stop button, or other suitable control.	✓

#